ALARM LOCK

T2 SERIES ELECTRONIC DIGITAL LOCKS

- Grade 1 Heavy Duty Cylindrical Lockset.
- UL Listed and FCC Certified.
- ADA Compliant Leversets.

• STRENGTH
• RELIABILITY
• INTEGRITY

Alarm Lock 2700 Series Trilogy

NOTE: The DL2700 Series can not be used on exterior applications.

AK-DL2700
US-26D

AK-DL2775ICS
US-26D

Features:
Keypad: All metal Vandal-Resistant 12-button
Operation: Rugged clutch mechanism.
Handing: Non-handed
User Codes: Up to 100 different user codes.
Code Length/No. of Codes: 3-5 digit codes
User Levels: Master, 10 Managers, 90 Users, 3 Service
Special Functions: Passage, Individual, Group, Lockout
Programming: Keypad. 4 different keypad tones or none.
Audit Trail Events: n/a
Scheduled Events: n/a
Remote Release Option: Yes, by special order.
Relay Control: Yes, for example an external siren or CCTV can be triggered
Power: 5 AA batteries, Supplied

Typical Cycles/Battery Indication: 120,000 cycles; visual & audible low-battery indicator.
Weather-Resistant Models: Specia order AK-DL2700WP model - Operating Range of Above WP's: WP's: -20° to +151°F
Proximity Card Support: n/a
Finishes: US-26D
Trim: Standard squared lever or curved
Door Thickness: 1-5/8" to 1-7/8"
Backset: 2-3/4"
Latchbolt: UL, 3 Hour, Fired-rated 1/2" throw solid brass
Strikes: 1-1/8" x 2-3/4" T strike & 1-1/4" x 4-7/8" ASA
Cylinder: DL2700 6-pin solid brass, SC1 keyway
DL2775ICS uses full size IC, core not included.

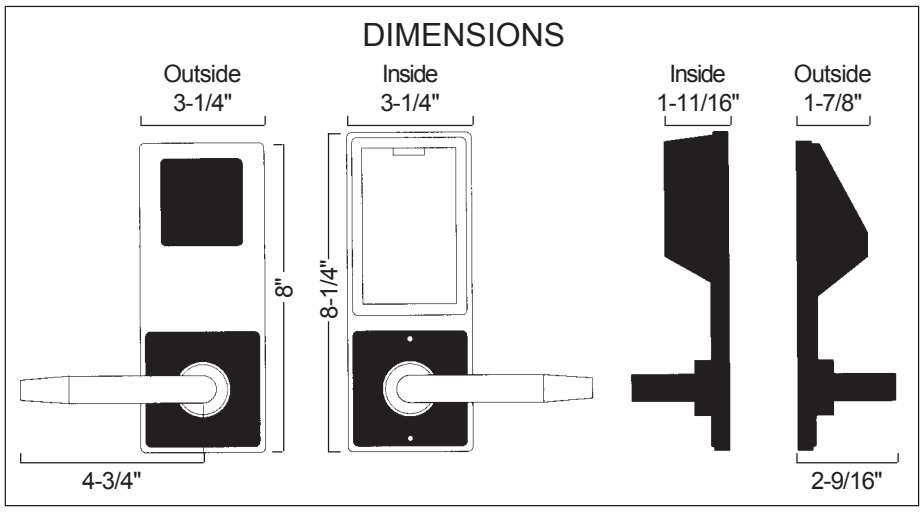

Continued on next page

©ZIPF LOCK COMPANY

ALARM LOCK

T2 SERIES ELECTRONIC DIGITAL LOCKS

▪ Continued from previous page.

FEATURES:

- Clutch mechanism offers exceptional reliability and strength.
- Super heavy-duty trim design with self-contained, fully programmable 12 digit metal keypad.
- Battery powered, uses five AA batteries for long-life dependability & audible low power alert.
- Non-handed for easy installation and versatility, retrofit or new.
- 2-wire remote override or key bypass capability.
- Visual and audible entry indicators.
- Available in lever or knob design with rekeyable cylinder (interchangeable core version-special factory order).
- UL Listed Grade One lockset with fire rated latch meets or exceeds BHMA specifications.
- Choose from polished brass, antique brass or satin chrome. (Polished chrome-special factory order)

12 KEY PROGRAMMABLE ACCESS CODES

- Multi-level user capability.
- Master code.
- Manager code.
- Passage function.
- One time emergency or service entrance code-erases from memory after use.
- Timed entry allowance from 5 to 20 seconds.
- Up to 15 different group or individual codes.
- Individual, group or total user lockout code.
- Master and management can temporarily or permanently change any or all user codes.
- Temporarily shuts down if incorrect code is entered three times consecutively..

REMEMBER: If you don't see what you need, please contact us with your requirements.

®ZIPF LOCK COMPANY

POLYGON SERIES

CAL-ROYAL

20 locks per case

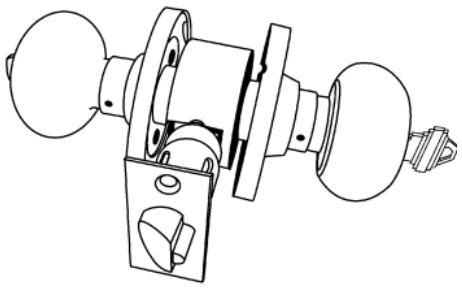

Heavy Duty Cylindrical Knobset

- **ANSI A156.2, Series 4000, Grade 2.**
- U.L. Listed For 3 Hour Doors.
- 1-year Warranty.
- **Equivalent to Schlage Plymouth Style Design.**

SPECIFICATIONS

DOOR THICKNESS:	1-3/8" to 1-3/4"
BACKSET:	2-3/4" with 1-1/8" wide face or 2-3/8" with 1" wide face, **please specify**
STRIKE:	ASA. 1-1/4" x 4-7/8".
BORE:	2-1/8" x 1"
ROSE:	3"
KEYWAY:	6-pin solid brass "C" keyway, furnished KA-4. Other keyways may be available, please call with requirements.
FINISHES:	**32D** Stainless Steel

To Order, Specify:

Design:	**PLG**	*Polygon*
Function:	**-00-**	*Entrance*
Finish:	**32D**	*Stainless Steel*
Latch:	**234**	*2-3/4" Backset*

Function	No.	Operation
Entrance	**-00-**	Turn/Push button locking. Pushing and turning button locks outside lever requiring use of key until button is manually unlocked. Pushing button locks outside lever until unlocked with key or inside lever is turned.

DIGITAL KEYPAD LOCK GRADE 1

CAL-ROYAL

Meets the Buy American Act

Lifetime Warranty
BHMA CERTIFIED

Heavy Duty

- **3 hour fire rated. UL10C UBC7-2-1997.**
- **90** Different User Codes.
- 10 Manager Codes. 5 Service Codes.
- Easy to Program using keypad.
- Weatherproof.
- Fastest and Easiest Installation in the Industry.
- 6 pin solid brass "C" keyway.

Features-

- 1 Master Code (all functions including entry)
- 1 Sub-master Code (all functions including entry Except Master Code)
- 10 Manager Code (perform SOME programming functions plus entry)
- 90 Basic User Access Codes (Entry Only)
- 5 Service Codes ("One-Time Entry" Codes)
- Two User Disable Modes:
  - •All User Codes Disabled Except Master Code & Sub-master Code
  - •All User Codes in a Bank Disabled Except Manager Codes
- 30-Second Keypad Anti-Tamper Lockout:
  - •Keypad Lockout After 3 Unsuccessful User Code Entries
- Uses 4 AA cell batteries (comes standard in packaging)
- A remote Push button can be wired to allow access when activated. (REM 1)
- Fire Alarm System (REM 2)
- Low Battery Warning

Stock No.	Function
CR-3000 26D	Entrance
***CR-3030 26D**	Passage
***ICCR3000 26D**	Entrance for I/C**

*Special order only. Call for delivery time.
**Accepts Best, Falcon, Arrow cores. Cores sold seperately.

®ZIPF LOCK COMPANY

KWIKSET

TOUCHPAD ELECTRONIC LEVER

Kwikset Signature Series

2 locks per case

SmartCode™ Levers

- One touch locking convenience.
- Installs in minutes with just a screwdriver.
- Requires 4 "AA" alkaline batteries (not included).
- Residential 1-Year Electrical warranty.
- Residential Lifetime Finish & Mechanical warranty.

Electronic Keyless Entry System

- Four customizable access codes for increased security.
- Back-Lit keypad for Increased Visibility.
- Customizable Automatic Door Locking After 30 Seconds for Peace Of Mind.
- Fits Standard Doors (1 3/8"-1 3/4").
- SmartCode™ Lever Ideal for - Small/ Home Office, Utility/Storage Room, Interior Garage/Slide Door.

911 Series
US-LO3,11P, 15

SPECIFICATIONS

DOOR THICKNESS:	1-3/8" to 1-3/4" automatic adjustment	
BACKSET:	Adjustable to 2-3/8" or 2-3/4" RCAL	
BORE:	2-1/8" x 1"	
BOLT THROW:	1/2"	
CYLINDER:	5 Pin SmartKey® only	
FINISHES:	**US-LO3**	Bright Brass - Lifetime
	US-11P	Venetian Bronze
	US-15	Satin Nickel

To Order, Specify:

Function:	**911**	*Keyed Entry*
Design:	**TNL**	*Tustin Lever*
Finish:	**US-15**	*Satin Nickel*
Cylinder:	**SMT**	*SmartKey*

NOTE: LO3 finish has the Lido Lever, **11P** and **15** finishes have the Tustin Lever.

RESIDENTIAL & LIGHT COMMERCIAL LEVER

Kwikset

20 locks per case

- ANSI/BHMA Grade 2 Certified.
- Lever functions satisfy 4.13.9 ADA requirement.
- 5-Pin Cylinder
- ADA Turnpiece.

KINGSTON (KNL)
US-3, 5, 15A, 26, 26D

Function	No.	Operation
PASSAGE/HALL/CLOSET	**720**	Both levers always free.
PRIVACY/BED/BATH	**730**	Both levers locked or unlocked by ADA turnbutton inside. Outside lever unlocked by emergency key. (KW-81087)
KEYED ENTRY LEVER	**740**	Both levers locked or unlocked by key outside or ADA turnbutton inside.

To Order, Specify:

Function #:	**740**	*Keyed Entry*
Design:	**KNL**	*Kingston*
Finish:	**US-26D**	*Satin Chrome*
Latch:	**6WAL**	*6-way Adjustable*

A limited supply of 200, 300, 400, 405 in US-5, 15A, 26 locks are available at closeout prices. The factory has discontinued these locks.

SPECIFICATIONS

DOOR THICKNESS:	1-3/8" to 1-3/4"	
BACKSET:	6WAL-Adjustable latch for 2-3/8", 2-3/4" with Square Face/Round Face/Drive-in.	
STRIKE:	2-1/4" full lip strike.	
BORE:	2-1/8" x 1"	
ROSE:	2-5/8"	
CYLINDER:	5-pin	
KEY BLANK:	KW-81063	
FINISHES:	**US-3** (605)	Polished Brass
	US-26D (626)	Satin Chrome

©ZIPF LOCK COMPANY

KWIKSET

TOUCHPAD ELECTRONIC DEADBOLT

Kwikset

2 locks per case.

Powerbolt Deadbolts

- 1" projection deadbolt latch with 1/4" diameter hardened steel free-turning roller.
- Easy to Install, Easy to Program, Easy to Use.
- Requires 4 "AA" alkaline batteries (not included).
- 1-Year Electronic warranty.
- Lifetime Mechanical warranty.
- Lifetime Finish warranty.

Electronic Keyless Entry System

- Simply enter your personalized access code for convenient, quick and care-free entry.
- You may also program a temporary second code for a neighbor, cleaning crew, etc.
- Alarm sounds after 3 consecutive incorrect codes are entered.
- Easy-one touch locking.
- Heavy duty security deadbolt and strike plate resist break-ins.
- No wiring necessary (add 4 Alkaline "AA" batteries).
- Low battery indicator.
- Fits standard preparation on new doors.
- Easily replaces existing door hardware.

SPECIFICATIONS

DOOR THICKNESS:	1-3/8" to 2"	
BACKSET:	Adjustable 2-3/8" to 2-3/4" RCAL	
BORE:	2-1/8" x 1"	
BOLT THROW:	1"	
CYLINDER:	5 Pin SmartKey® only	
FINISHES:	**US-LO3**	Bright Brass - Lifetime
	US-11P	Venetian Bronze
	US-15	Satin Nickel

907 Series
US-LO3,11P, 15

To Order, Specify:

Function: **907** *Single Cylinder*
Finish: **US-15** *Satin Nickel*
Cylinder: **SMT** *SmartKey*

Stock No. **Operation**

907 **Single Cylinder Deadbolt-**

Deadbolt latch retracted by entering security code outside and extended by pushing lock button outside. Deadbolt latch extended and retracted by T-Turn on inside. Using key outside will retract deadbolt latch if needed.

TOUCHPAD ELECTRONIC DEADBOLT

2 locks per case.

SmartCode™ Deadbolts

- Lock your door with a touch of a button.
- Installs in minutes with just a screwdriver.
- Requires 4 "AA" alkaline batteries (not included).
- 1 Year Electronic warranty.
- Lifetime Finish & Mechanical warranty.

Electronic Keyless Entry System

- Two customizable codes - one code for family, one code for temporary access.
- Back-Lit keypad for Increased Visibility.
- One touch locking with a motorized deadbolt.
- Fits Standard Doors (1 3/8"-1 3/4").
- SmartCode™ Deadbolt replaces any deadbolt for Keyless Entry convenience.

909 Series
US-LO3,11P, 15

Stock No. **Operation**

909 **Single Cylinder Deadbolt-**

Deadbolt latch retracted by entering security code outside and extended by pushing lock button outside. Deadbolt latch extended and retracted by T-Turn on inside. Using key outside will retract deadbolt latch if needed.

SPECIFICATIONS

DOOR THICKNESS:	1-3/8" to 1-3/4" automatic adjustment	
BACKSET:	Adjustable to 2-3/8" or 2-3/4" RCAL	
BORE:	2-1/8" x 1"	
BOLT THROW:	1"	
CYLINDER:	5 Pin SmartKey® only	
FINISHES:	**US-LO3**	Bright Brass - Lifetime
	US-11P	Venetian Bronze
	US-15	Satin Nickel

To Order, Specify:

Function: **909** *Single Cylinder*
Finish: **US-15** *Satin Nickel*
Cylinder: **SMT** *SmartKey®*

®ZIPF LOCK COMPANY

MASTER LOCK

ELECTRONIC DEADBOLT with LIGHT UP keypad

2 locks per case

- Meets ANSI grade performance standards.
- Available with either Kwikset or Schlage keyways

Stock No.	Finish
KW1 Keyway	
DSKP0603PD	Polished Brass
DSKP0605D	Antique Brass
DSKP0612D	Aged Bronze
DSKP0615D	Satin Nickel
SC1 Keyway	
DSKP0603P	Polished Brass
DSKP0605	Antique Brass
DSKP0612	Aged Bronze
DSKP0615	Satin Nickel

FEATURES—

- Programmable keypad stores up to 20 unique 4 to 10 digit user codes.
- Easy programming - add or delete user codes as needed.
- Admin code - prevents unauthorized user code adds or changes. Only the person with the admin code can reprogram.
- Keypad illuminates for easy nighttime use.
- **NightWatch™** feature prevents an intruder from entering, even if they have a copy of the key.
- **BumpStop™** advanced cylinder technology resists bump attacks.
- Silvabond antimicrobial finish provides a permanent barrier to fight the spread of germs, mold and mildew by contact.
- Meets ANSI grade performance standards.
- Uses four AAA batteries - included.
- Back up key may be used for keyed access.

NightWatch™ locks out all keys, even copies of your key. Enjoy the peace of mind knowing that unaccounted keys are rendered harmless.

BumpStop™ Advanced Cylinder Technology. Specially engineered to resist bump attacks, one of the fastest growing home security threats.

When the NightWatch feature is engaged, the lock cannot be opened from the outside, even with a duplicate key. Can only be engaged or disengaged from the inside of the home.

To use: lock the deadbolt. Press up on the safety button while pulling lever to engage NightWatch® lockout feature.

SPECIFICATIONS

DOOR THICKNESS:	1-3/8” to 2”
BACKSET:	2 round corner latches, one 2-3/8” and one 2-3/4”. Use the one you need.
STRIKE:	1-1/8" x 2-3/4" square corner
BORE:	2-1/8” x 1"
***KEYWAYS:**	KW1 Kwikset or SC1 Schlage
FINISHES:	**03P** Polished Brass
	05 Antique Brass
	12 Aged Bronze
	15 Satin Nickel

*NOTE: Lock with the SC1 keyway uses Ilco 15995 cylinder so many keyways are available by changing the cylinder.

©ZIPF LOCK COMPANY

FE SERIES ELECTRONICS

6 locks per case

Keypad Entry Locks

- ANSI A156.2-2003 bored locks and latches.
- Residential Lifetime Mechanical Warranty.
- Residential Lifetime Finish Warranty.
- FCC Part 15, CE Mark.

FE575 Auto-Lock

Shown with Camelot escutcheon and Accent levers (FE575 PLY x FLA)

FE595 Flex-Lock

Shown with Plymouth escutcheon and Flair levers (FE595 CAM x FLA)

Security and Quality

- Grade 2 ANSI/BHMA certified
- Patented commercial grade clutching motor drive: tested to one million cycles.
- Vandal resistant clutching lever and knob design.
- Code control, 6-digit programming code required to add and delete user codes.
- Warning code sounds after 4 incorrect codes entered; keypad disabled for 30 seconds.
- Mechanical key override: patent pending.

Convenience

- Convenient keyless access; no keys to hide, lose or forget.
- Pre-set with random 6-digit programming code and two random 4-digit user codes.
- 19 user code capacity; 10,000 user code combinations.
- Easily programmed right at the keypad; no need to re-move inside escutcheon.
- Blue LEDs illuminate the keypad on demand.
- Reversible levers for left- or right-handed doors.
- Emergency exit feature; allows for panic-free exit.
- Locks can be rekeyed to match existing locks.
- 9-volt alkaline battery included.
- Up to 3 year battery life with low battery alert.

FE575 Auto-Lock Feature
Auto locking, automatically re-locks after 5 seconds. Unlock by valid user code from outside. Inside knob or lever always unlocked. Ke can be used to unlock as back-up.

FE595 Flex-Lock Feature
Flex locking, switch between unlocked or automatic re-locking. Unlocked by valid user code from outside. Inside knob or lever always unlocked. Key can be used to unlock as back-up.

Function	Escutch. Design	Finish	Design
FE575	**CAM**	505,613,716	**ACC**
FE575	**PLY**	626	**ELA**
FE575	**PLY**	505,716	**FLA**
FE575	**PLY**	505	**PLY**
FE595	**CAM**	505,609,613,619,626,716	**ACC**
FE595	**CAM**	505	**GEO**
FE595	**CAM**	609	**GEO**
FE595	**CAM**	619	**GEO**
FE595	**PLY**	626	**ELA**
FE595	**PLY**	505,609,613,619,716	**FLA**
FE595	**PLY**	605	**PLY**

How to order: (example)

Specify Function	Escutcheon Design	Finish	Design
FE595	**PLY**	**619**	**FLA**

SPECIFICATIONS

DOOR THICKNESS:	1-3/8" to 1-3/4"	
BACKSET:	3AL-Adjustable latch for 2-3/8", 2-3/4" with Square Face/Round Face/Drive-in.	
STRIKE:	Both RCS, SCS.	
BORE:	2-1/8" x 1"	
KEY BLANK:	35-100-C	
KEYWAYS:	C Standard, 5-pin	
FINISHES:	**505**	ULTIMA™, Bright Brass
	609 (US-5)	Antique Brass, clear coated
	613 (US-10B)	Oil Rubbed Bronze*
	619 (US-15)	Satin Nickel Plated
	620 (US-15A)	Antique Pewter
	626 (US-26D)	Satin Chrome
	716	New Aged Bronze

*613 is a living finish and will wear and change appearance over time

©ZIPF LOCK COMPANY

SCHLAGE

BE SERIES ELECTRONICS

6 locks per case

Keypad Deadbolts

- Grade 2 ANSI/BHMA certified.
- ANSI A156.5-2001 Grade 2 auxiliary locks.
- Residential Lifetime Mechanical Warranty.
- Residential Lifetime Finish Warranty.
- FCC Part 15, CE Mark.

Shown with Camelot escutcheon

Exterior

Interior

SPECIFICATIONS

DOOR THICKNESS:	1-3/8" to 1-3/4"	
BACKSET:	3AL-Adjustable latch for 2-3/8", 2-3/4" with Square Face/Round Face/Drive-in.	
STRIKE:	Round Corner (RCS)	
BORE:	2-1/8" x 1"	
KEY BLANK:	35-100-C	
KEYWAYS:	C Standard, 5-pin	
FINISHES:	**505**	ULTIMA™, Bright Brass
	609 (US-5)	Antique Brass, clear coated
	613 (US-10B)	Oil Rubbed Bronze*
	619 (US-15)	Satin Nickel Plated
	620 (US-15A)	Antique Pewter
	625 (US-26)	Bright Chrome
	626 (US-26D)	Satin Chrome
	716	New Aged Bronze

*613 is a living finish and will wear and change appearance over time

BE365 with Turn-Lock Feature

Schlage Keypad Deadbolts bring professional grade security with the convenience of keyless access to the home. The innovative Turn-Lock feature allows the user to lock and leave without a key. Ideal for front, back and side entry doors where deadbolts are required.

Security and Quality

- Grade 2 ANSI/BHMA certified
- Patented commercial grade clutching motor drive: tested to one million cycles.
- Vandal resistant free spinning deadbolt turn.
- Code control, 6-digit programming code required to add and delete user codes.
- Warning code sounds after 4 incorrect codes entered; keypad disabled for 30 seconds.
- Mechanical key override: patent pending.

Convenience

- Convenient keyless access; no keys to hide, lose or forget.
- Pre-set with random 6-digit programming code and two random 4-digit user codes.
- 19 user code capacity; 10,000 user code combinations.
- Easily programmed right at the keypad; no need to remove inside escutcheon.
- Blue LEDs illuminate the keypad on demand.
- Locks can be rekeyed to match existing locks.
- 9-volt alkaline battery included.
- Up to 3 year battery life with low battery alert.

Stock No.	Description
BE365 CAM	with Camelot escutcheon
BE365 PLY	with Plymouth escutcheon

•Specify finish when ordering.

FE SERIES for ELECTONICS

Keypad Front Entry (Bottom Half)

- Residential Lifetime Mechanical Warranty.
- Residential Lifetime Finish Warranty.

Camelot (CAM)

Plymouth (PLY)

FE285 Front Entry (bottom half) Handleset

Combine Schlage's Keypad Deadbolt (shown above) with the FE285 Front Entry to get a complete Handleset with keypad access. All FE285 are stocked with the interior knob/lever. See chart below for availability.

Function	Escutcheon Design	Finish	Inside Design	Hand	***Finish (specify)
FE285	**CAM**	***	**ACC**	**LH**	505,619,620,716
FE285	**CAM**	***	**ACC**	**RH**	505,619,620,716
FE285	**CAM**	***	**GEO**		505
FE285	**PLY**	***	**FLA**	**LH**	505,609,613,619,620,626,716
FE285	**PLY**	***	**FLA**	**RH**	505,609,613,619,620,626,716
FE285	**PLY**	***	**PLY**		505,613

Accent(ACC)

Flair(FLA)

Georgian(GEO)

Plymouth(PLY)

®ZIPF LOCK COMPANY

E-PLEX E2000 SERIES ELECTRONIC ACCESS CONTROL

SIMPLEX®

- ANSI/BHMA A156.2, Grade 1 Certified.
- Meets A.D.A. accessibility standard.
- 100 access codes - including user and service levels.
- Cylindrical latch. Metal, vandal-resistant keys.
- Simple to install and maintain. **No wiring**.
- Easy to manage - no software required.
- Non handed - field reversible.
- **2-year warranty from date of installation. Built-in warranty counter in lock memory.**

E-PLEX®

Stock No.	Description
SI-E2031-LL-626-41	No key override
SI-E2031-B-LL-626-41	With key override-Best type I/C
SI-E2031-XS-LL-626-41	With key override-Schlage "C"

SPECIFICATIONS

DOOR THICK.:	1-3/8" to 2-1/4"
BACKSET:	2-3/4"
THROW:	1/2"
HANDING:	Non-handed, pre-assembled for left hand, easily changed in field
LOCK BODY:	Height 8-15/16" x Width 3-5/16" x Depth 2-13/16"
MINIMUM STILE:	5"
FINISH:	**26D** Satin Chrome

Easy to install: The E-Plex 2000 easily installs on wood or metal doors with ASA 161 door prep. Three through bolts secure the lock to the door. Requires no wiring to or through the door. Eliminates risk of damage from pinched wires that can result in costly callbacks. Rugged and weather-resistant external housing can be mounted outdoors and includes installation gasket.
Easy to manage: With the E-Plex 2000 users and locks are easily managed at the door with simple keypad programming. Multiple operation modes include PIN entry, passage and lockout. Passage mode can be activated by authorized user with assign PIN and pre-programmed to re-lock after a certain number of hours. Four authority levels give you control over who has access to various lock functions.
Easy to use: The user friendly design is equipped with ADA compliant levers. Programmable user parameters customize the lock to the needs of different access points. Audio and visual indicators notify users when access is granted or denied. User access code length can be set from 4 to 8 digits. Time interval between combination entry and relocks is variable from 2 to 20 seconds. Anti-tamper feature disables the lock after multiple invalid combination entries—set for between 3 to 9 attempts and up to 90 seconds. **3 AA batteries allows for continuous operation up to 100,000 cycles.**

E-PLEX E5000 SERIES ELECTRONIC ACCESS CONTROL

E-PLEX®

- ANSI/BHMA A156.2, Grade 1 Certified.
- 3-hour UL/ULC Fire rating for "A" label doors.
- Meets A.D.A. accessibility standard.
- Both housings are weather resistant.
- LectroBolt™ - **eliminates running wiring**.
- **3-year warranty from date of installation. Built-in warranty counter in lock memory.**

Stock No.	Key Override
SI-E5031-XK-WL-626	Kaba 90
SI-E5031-XS-WL-626	Schlage "C"

SPECIFICATIONS

DOOR THICK.:	1-3/8" to 2-1/4"
BACKSET:	2-3/4"
THROW:	1/2"
HANDING:	Non-handed, pre-assembled for left hand, easily changed in field
LOCK BODY:	Height 8-7/8" x Width 3-3/8" x Depth 3-13/16"
MINIMUM STILE:	5"
FINISH:	**26D** Satin Chrome

The E-Plex 5000 Series combines the strength, simplicity and reliability of Simplex® mechanical push-button locks with the added security and features of electronic access control - it's never been easier to Power Up your access control.
Controls access with up to 100 access codes(upgrades to 300 codes with optional software). Exterior access is by combination or key override, and egress is by interior lever and is free at all times.

Applications: Ideal for controlling access to security sensitive areas in commercial, industrial, educational, governmental, healthcare, lodging, and multi-unit residential settings. It's perfect for restricted areas with a high user turnover rate.
Keyless convenience: Eliminates problems and costs associated with issuing, controlling, and collecting keys and magnetic cards.
Flexible operational modes: Combination (PIN) entry, Passage (programmable), Lockout.
Easy to manage: User access programmed at the lock or managed with **optional** Microsoft Excel™ based software. Users quickly added and deleted. Optional software provides increased control as facility's users and access points increase. Five authority levels allow you to control user's access to various lock functions: Master, Manager, User, Service and Maintenance. Service level has authority to gain access once, or programmed for 1 to 24 hours - for service personnel, meeting rooms, and rental space.
Extensive audit trail for added security: Lock records last 3,000 events (upgrades to 9000 events with optional software) for user accountability.
Flexible user preferences: Adjustable anti-tamper lockout disables lock after 3 to 9 invalid entry attempts for up to 90 seconds. Adjustable relock time after combination entry from 2 to 20 seconds. Variable length access codes set from 4 to 8 digits.
Additional Specifications: (4) four AA Alkaline batteries-located in interior housing; Battery life up to 180,000 cycles; Lock data is retained if batteries fail; audible and visual indicators; low battery visual indicator.

®ZIPF LOCK COMPANY

Simplex - Mechanical Pushbutton Locks

KABA® SIMPLEX®

Simplex mechanical pushbutton locks offer a convenient way to control access between public and private areas. There are no keys or cards to manage, no computers to program, no batteries to replace, and combinations can be changed in seconds without removing the lock from the door.

Simple as 1-2-3. PIN codes are made up of any combination of one to five numbers (pressed individually or simultaneously). The locks allow thousands of possible PIN code combinations. PIN codes are quickly and easily changed without removing the lock from the door. Eliminates normal expense associated with the issue, control, and collection of keys and magnetic cards.

SIMPLEX 1000 SERIES HEAVY DUTY LOCK

SIMPLEX®

- 3-hour UL/ULC Fire rating for "A" label doors.
- Highly weather resistant.
- Vandal resistant, solid metal pushbutton (5 buttons).
- **3-year warranty.**

To Order, Specify:

Stock No:	**SI-1021-**	*Entrance*
*Core Type:	**B**	*For Best Type Core*
Finish:	**26D**	*Satin Chrome*
	-41	

Core not required on 1011 or 1031 function

***SPECIFY CORE TYPE-**
B-Best, Arrow
S-Schlage
Cores not furnished-we stock Arrow cores w/Best Keyways and Schlage full size cores

STOCK NUMBERS & FUNCTIONS



Stock No.
SI-1011
Standard model. Access by combination.



Stock No.
SI-1021*
Access by combination or key bypass.



Stock No.
SI-1031
Access by combination or passage feature. (Passage feature controlled by thumbturn or key-determined at installation)



Stock No.
SI-1041*
Access by combination, key bypass or passage feature. (Passage feature controlled by thumbturn or key-determined at installation)

***SPECIFY CORE TYPE:** **B-**Best, Arrow or **S-**Schlage. Core not included, order seperately.

Combination Code: One code per lock made of any combination of one to five numbers (pressed individually or simultaneously). **Number of Combinations:** Thousands of possible combinations. **Emergency Access:** Optional mechanical key override.

SPECIFICATIONS

DOOR THICK.:	1-5/8" to 2"
BACKSET:	2-3/4"
THROW:	1/2"
STRIKE:	ASA and standard strike plates included
HANDING:	Factory handed for LH, easily field reversible
LOCK BODY:	Height 7-3/8" x Width 3-1/8" x Depth 3-13/16"
MINIMUM STILE:	5" recommended
FINISH:	**26D** Satin Chrome

A NOTE ABOUT THE PASSAGE FUNCTION—
When activated by an inside thumbturn or key cylinder, the outside knob can be set to open the lock without the need for using the pushbutton combination. Designed for use in offices, etc., when the door is to be left unlocked for extended periods.

®ZIPF LOCK COMPANY

SIMPLEX L1000 SERIES HEAVY DUTY LOCK

SIMPLEX®

- 3-hour UL/ULC Fire rating for "A" label doors.
- Meets A.D.A. accessibility standard.
- Compliance with D.O.D. 5220.22M.
- Highly weather resistant.
- Vandal resistant solid metal pushbutton (5 buttons).
- **3-year warranty.**

Stock No.	Handing
SI-LL1011-	Left Hand
SI-LR1011-	Right Hand
SI-LL1021*	Left Hand
SI-LR1021*	Right Hand
SI-LL1031-	Left Hand
SI-LR1031-	Right Hand

***SPECIFY CORE TYPE-**
B-Best, Arrow
C-Corbin.Russwin
S-Schlage
Cores not furnished-we stock Arrow cores w/Best Keyways and Schlage cores

FUNCTIONS



SI-L 1011 (Lever)
Standard model. Access by combination.



SI-L 1021* (Lever)
Access by combination or key bypass.



Stock No.
SI-L1031 (Lever)
Access by combination or passage feature. (Passage feature controlled by thumbturn or key-determined at installation)

***SPECIFY CORE TYPE.** Core not included, order seperately.

To Order, Specify:

Stock No:	**SI-LR1021-**	*Entrance*
*Core Type:	**B**	*For Best Type Core*
Finish:	**26D**	*Satin Chrome*
	-41	

Core not required on 1011 or 1031 function

SPECIFICATIONS

DOOR THICK.:	1-3/8" to 2"
BACKSET:	2-3/4"
THROW:	1/2"
STRIKE:	ASA and standard strike included
HANDING:	Factory Handed, not field reversible
LOCK BODY:	Height 7-3/8" x Width 3-1/8" x Depth 3-13/16"
MINIMUM STILE:	5" recommended
FINISHES:	**03** Bright Brass**,** stocked in 1011 function only.
	26D Satin Chrome

SIMPLEX EE1000 SERIES HEAVY DUTY LOCK

SIMPLEX®

- 3-hour UL/ULC Fire rating for "A" label doors.
- Highly weather resistant.
- Vandal resistant solid metal pushbutton (5 buttons).
- **1-year warranty.**

SPECIFICATIONS

DOOR THICK.:	1-3/4" to 2-1/4"
BACKSET:	2-3/4"
THROW:	1/2"
STRIKE:	ASA and standard strike plates included
HANDING:	Factory handed for LH, easily field reversible
LOCK BODY:	Height 7-3/8" x Width 3-1/8" x Depth 3-13/16"
MINIMUM STILE:	5" recommended
FINISH:	**26D** Satin Chrome

ACCESS CONTROL FROM BOTH SIDES OF THE DOOR

Stock No.	Description
SI-EE1021B/B-26D-41	Combination/Key bypass for entry/egress
SI-EE1021S/S-26D-41	Combination/Key bypass for entry/egress

B-for use with Best type cores, **S**-for use with Schlage full size core
Cores not included. Order cores seperately.

Combination Code: One code per lock made of any combination of one to five numbers (pressed individually or simultaneously). **Number of Combinations:** Thousands of possible combinations. **Emergency Access:** Optional mechanical key override.

®ZIPF LOCK COMPANY

SIMPLEX

SIMPLEX 5000 SERIES EXTRA HEAVY DUTY LOCK

SIMPLEX®

- ANSI/BHMA A156.2, Grade 1 Certified.
- 3-hour UL/ULC Fire rating for "A" label doors.
- Meets A.D.A. accessibility standard.
- Highly weather resistant.
- Vandal resistant solid metal pushbuttons (5 buttons).
- **3-year warranty.**

To Order, Specify:

Stock No. and Core if required.

SPECIFICATIONS

DOOR THICK.:	1-5/8" to 2"
BACKSET:	2-3/4"
THROW:	1/2"
STRIKE:	ASA and standard strike included
HANDING:	Factory handed for LH, easily field reversible
LOCK BODY:	Height 8-7/8" x Width 3-3/8" x Depth 3-13/16"
MINIMUM STILE:	5" recommended
FINISHES:	**26D** Satin Chrome

Stock No.

•Key-in-Lever Schlage C Keyway

SI-5021-XS-WL-26D

•Best & compatables (core not included)

***SI-5021-B-WL-26D**

*Please specify if core required.

Ideal for high-traffic security-sensitive area where access control is required. **Combination Code:** One code per lock made of any combination of one to five numbers (pressed individually or simultaneously). **Number of Combinations:** Thousands of possible combinations. **Code Changing:** Accomplished with the lever release combination change tool from the lock exterior (5021). **Emergency Access:** Mechanical key override.

Application—Model 2015 and LP1000 (next page) exit device controls are designed to operate surface mount (rim-mounted) exit devices from the outside using a tailpiece, which replaces the key cylinder on new or existing devices. Any standard pull can be mounted with model 2015. They provide exterior access by combination, while allowing free egress at all times by interior exit device. The locks can be used with many leading brands of surface-mounted (rim-mounted) exit devices.

SIMPLEX 2015 SERIES EXIT DEVICE CONTROL

SIMPLEX®

- Highly weather resistant.
- Vandal resistant metal pushbuttons (5 buttons).
- 1-year warranty.

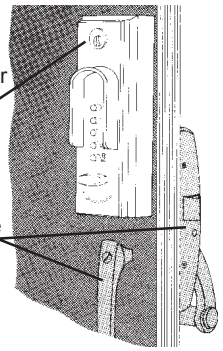
6-pin tumbler cylinder keys for combination change access. Keyed Different.
Exit device & handle not included. Order seperately.

SPECIFICATIONS

DOOR THICK.:	1-3/8" to 2-1/2"
LOCK BODY:	Height 8-5/8" x Width 3-1/8" x Depth 2-3/4"
TAILPIECE:	2-3/4" adjustable tailpiece for exit device operation from outside
HANDING:	For non-handed or clockwise-rotating exit device hubs only (adjustable up to 90°)
MINIMUM STILE:	3-1/8" recommended
FINISH:	**26D** Satin Chrome

Stock No.

SI-2015-26D-41

Finish: Satin Chrome

EXIT DEVICE COMPATIBILITY (subject to change)

- **American Device** 6300 Series, 6303 Series
- **Corbin** 21, 22, 25, 26NT, 27K, 29, 29-1/4, 29M2, 29-1/2M2, 29NTM2, 29D20, LA29, 39, 39EL, 39LLD, 390, LA39
- **Detex Advantex Series** 10, 20, 21, 40, 50, 51
- **Magno Krom LHR only:** 500-4, 550-4, 650-4, 1500-4, 1550-4, 1650-4; RHR only: 600-3
- **Monarch** 18RBA, 18RP, 18VP, F18RBA, F18RP, F18VP, FXXRBA, FXXRP, FXXVP, XXRBA, XXRP, XXVP
- **Precision Hardware** FL-D103; RHRB only 810-H; RH or LH: 103, R103, D203, H-203, 1103, D1203, H1203
- **Russwin** 365, 365 ¼, LT365, 370, 372, LA372, 375, LT375, 377, 382, 384, 385, 388, 572, 572EL, 572ELD, U572, LA572
- **Sargent** 2813, 2804, 6804, 12-6804, 9804RHRB, 12-9804LHRB, 9898E, 9898K
- **Von Duprin** 22 Rim, 22 Rim-F, 88 Rim, 88 Rim-F, 98 Rim, 98 Rim-F, 99 Rim, 99 Rim-F; 2227, 2227-F, 9827, 9827-F, 9847, 9847-F, 9927-F, 9947-F
- **Yale** 1500 Series, 7000 Series

®ZIPF LOCK COMPANY

SIMPLEX

Application—Model 2015 (previous page) and LP1000 exit device controls are designed to operate surface mount (rim-mounted) exit devices from the outside using a tailpiece, which replaces the key cylinder on new or existing devices. Any standard pull can be mounted with model 2015. They provide exterior access by combination, while allowing free egress at all times by interior exit device. The locks can be used with many leading brands of surface-mounted (rim-mounted) exit devices.

SIMPLEX®

SIMPLEX LP1000 SERIES EXIT DEVICE OPERATOR

Need a core or exit device??
Just let us know.

- 3-hour UL/ULC Fire rating for "A" label doors.
- Highly weather resistant.
- Vandal resistant solid metal pushbuttons (5 buttons)
- **3-year warranty.**

LP1000 Series can not be used with mortise design and most vertical rod exit devices.

Removable core, latch and exit device not included. Can order seperately.

SPECIFICATIONS

DOOR THICK.:	1-3/8" to 2-1/4"
LOCK BODY:	Height 8-3/4" x Width 4-3/8" x Depth 3-15-16"
TAILPIECE:	2-3/4" tailpiece for exit device operation from outside
HANDING:	Factory handed, not field reversible
MINIMUM STILE:	5"
FINISH:	**26D** Satin Chrome

EXIT DEVICE COMPATIBILITY:

- **Von Duprin:** Exit Only (EO) or Exit Only Fire (EOF) 22, 88 NL, 98, 99, 9857, 9957.
- **Detex Advantex Series:** 10, 20, 21, 40, 50, 51.
- **Dorma:** 9100, 9300, 9400.
- **Monarch:** XXR*, FXXR*, 18R*, F18R*, XXV*, FXXV*, 18V*, F18V*. (*Requires special K adapter - contact Monarch)

Cannot be used with most vertical rod exit device.

Stock No.	Description
SI-LLP1020B-26D-41	Left Hand, For Best type core
SI-LRP1020B-26D-41	Right Hand, For Best type core
SI-LLP1020S-26D-41	Left Hand, For Schlage full size core
SI-LRP1020S-26D-41	Right Hand, For Schlage full size core

Application—Model 3000 series locks provide fully mechanical pushbutton access control for narrow stile aluminum glass doors. It provides exterior access by combination or key override, while allowing free egress at all times.

Model 3000 series is designed for use with Adams Rite 4510/4710/4910 mortise latch mechanisms (order separately). Any standard MS mortise cylinder that operates the Adams Rite latch will function with the 3000 series lock. Suitable for inswing and outswing doors.

SIMPLEX 3000 SERIES NARROW STILE LOCKS

- Highly weather resistant.
- Vandal resistant solid metal pushbuttons (5 buttons)
- 1-year warranty.

SPECIFICATIONS

LOCK BODY:	Height 9-5/8" x Width 1-17/32" x Depth 2-5/8"
BACKSET:	3010 & 3020 31/32"; 3030 & 3040 1-1/8"
STILE WIDTH:	1-7/8" minimum, required for mounting
DOOR THICK.:	1-3/4" maximum

You must order housing and drive assembly for complete lock

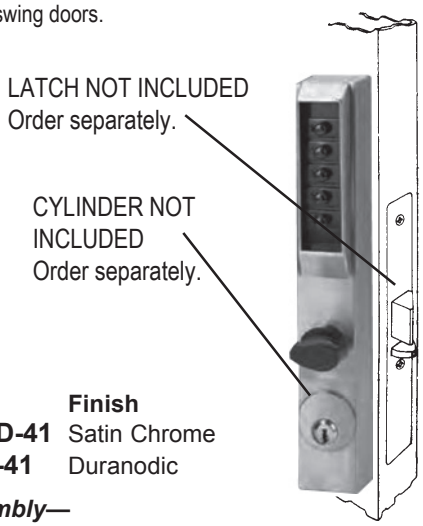

Housing—

Stock No.	Finish
SI-3001-26D-41	Satin Chrome
SI-3001-55-41	Duranodic

Drive Assembly—

Stock No.	Backset and Handing
SI-3010-19-41	31/32" backset RH or RHRB
SI-3020-19-41	31/32" backset LH or LHRB
SI-3030-19-41	1-1/8" backset RH or RHRB
SI-3040-19-41	1-1/8" backset LH or LHRB

Features:

Key override can be used to override the lock combination and gain access using a key. This feature allows facilities to initiate or maintain a master-keyed security system. The lock accepts MS (maximum security) mortise cylinders.

Passage (latch holdback) allows access without using the lock entry code, keeping the door unlocked. This feature is activated from the outside using cylinder override key.

Lockout disables the lock so that entry codes cannot be used to gain access. Access if permitted using the key override only. This feature is activated from the outside using the cylinder override key.

®ZIPF LOCK COMPANY

SIMPLEX 900 SERIES LIGHT COMMERICIAL/ RESIDENTIAL LOCK

SIMPLEX®

1-year warranty

Deadbolt Function—

To open from outside, press combination and turn front knob to open. The lock remains open (bolt retracted) until either the inside lever or outside knob is turned to throw bolt into locked position.

Spring Latch Function (Night Latch)—

Locks automatically when door closes and requires correct combination to re-open from outside. Can always be opened from inside by turning lever. The thumb slide on inside housing is used to hold the deadlocking latch in a retracted position to keep the Simplex lock open, when desired. For doors that swing out, the latch bolt can be reversed.



SPECIFICATIONS

Backset: Outswing door: 2-9/16"
Inswing door: 2-1/2"
Latch: On Deadbolt lock 1"
Keypad: Vandal resistant, 5 button.
Handing: Field reversible latch. Invert lock for right hand door.
Bore: 1-5/8" for barrel, 3/4" for thumbturn, 7/8" for key overide
Warranty: 1 year
***Door Thickness:**
1-3/8" for 1-3/8" to 1-1/2" thick doors
1-3/4" for 1-3/4" to 2-1/8" thick doors



•Deadbolt door lock with 1" bolt—

Stock No.	Thick*	Finish
SI-9020000-04-41**	1-3/8"	Satin Brass
SI-9020000-26D-41	1-3/8"	Satin Chrome
SI-9040000-04-41	1-3/4"	Satin Brass
SI-9040000-26D-41	1-3/4"	Satin Chrome

•Above Lock With Key By-pass Cylinder—

Stock No.	Thick*	Finish
SI-9060000-04-41**	1-3/8"	Satin Brass
SI-9060000-26D-41**	1-3/8"	Satin Chrome
SI-9100000-04-41**	1-3/4"	Satin Brass
SI-9100000-26D-41	1-3/4"	Satin Chrome

**Special order

•Spring Latch door lock with hold back—

Stock No.	Thick*	Finish
SI-9170000-04-41	1-3/8"	Satin Brass
SI-9170000-26D-41	1-3/8"	Satin Chrome
SI-9190000-04-41	1-3/4"	Satin Brass
SI-9190000-26D-41	1-3/4"	Satin Chrome

Key By-pass Option—

Above models (deadbolt & night latch) are available with an optional key cylinder that provides the flexibility of a master key system and the security advantages of a combination lock. Employees, tenants, etc., use the pushbutton combinations. The key insures entry, reguardless of the combination setting used.



INSIDE VIEW
of Spring (Night) Latch Function



Adapter Kit For Metal Door & Frame Installations—

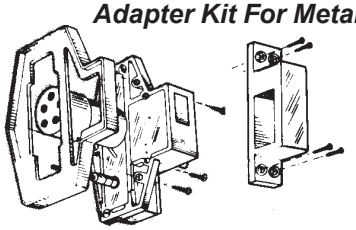

Chrome Finish
SI-800-26D-41

Adapter kit containing a special surface-mounted cast strike and adjustable riser plate as shown is available. The special strike is fastened to the inside surface of the metal frame and eliminates the need to cut or mortise the frame for the standard strike. The adjustable riser plate raises the lock housing to ensure proper alignment of the latch or dead bolt with the special strike.

For Wood Door And Frame Installation—

Just drill two holes-one 7/8" and one 1-5/8". All Simplex 900 Series Door Locks require a minimum flat surface of 3-3/4" on inside of door to mount. FOR METAL DOOR INSTALLATION, YOU SHOULD ORDER THE SI-800-26D-41 ADAPTER KIT

®ZIPF LOCK COMPANY

SIMPLEX 6200 SERIES LIGHT COMMERICIAL/ RESIDENTIAL LOCK

SIMPLEX®

- 3-hour UL.ULC fire rating for "A" label doors.
- Vandal resistant solid metal pushbuttons (5 buttons).
- Retrofits 2-1/8" standard bore cylindrical locksets.
- **1-year warranty**.

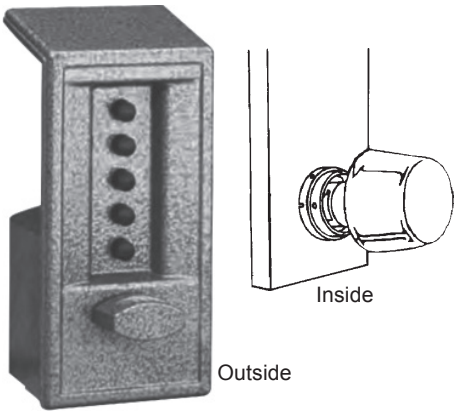

SPECIFICATIONS

LOCK BODY:	Height 5-7/8" x Width 2-3/4" x Depth 2-9/16"
BACKSET:	2-3/4"
THROW:	1/2"
BORE:	2-1/8" plus 2 additional holes
STRIKE:	T-strike with strike box
DOOR THICK.:	1-3/8" to 2-1/4"
MINIMUM STILE:	5"
HANDING:	Factory handed left, easily field reversible

Stock No.	**Finish**
SI-6204-60-41	Gold Tone
SI-6204-86-41	Grey

Access by combination, while allowing free egress at all times by interior knob. The lockset automatically relocks each time the door closes. The lock can be inverted if the existing auxiliary lock obstructs installation.

Combination Code: One code per lock made of any combination of one to five numbers (pressed individually or simultaneously). **Number of Combinations:** Thousands of possible combinations.

SIMPLEX 7100 SERIES LIGHT COMMERICIAL/ RESIDENTIAL LOCK

- Vandal resistant solid metal pushbuttons (5 buttons).
- Highly weather resistant.
- **1 year warranty.**

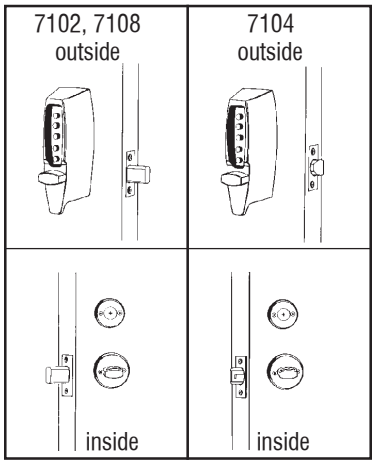

SPECIFICATIONS

LOCK BODY:	Height 6-1/2" x Width 2-1/2" x Depth 2-1/2"
BACKSET:	varies by model number
THROW:	varies by model number
BORE:	1-3/8" x 1"
STRIKE:	**7102, 7108:** Flat strike **7104**: curved lip strike
DOOR THICK.:	1-3/8" to 2-1/4"
MINIMUM STILE:	4"
HANDING:	Field reversible

The 7100 Series lockset provides fully mechanical primary or auxiliary push-button access control by exterior combination, while allowing free egress at all times by interior thumbturn. Deadbolt models are manually relocking. Deadlocking models automatically relock each time the door closes. 7100 Series locks mount above the existing lockset, or can be used alone.

Combination Code: One code per lock made of any combination of one to five numbers (pressed individually or simultaneously). **Number of Combinations:** Thousands of possible combinations.

Stock No.	**Finish**
• 1" deadbolt, 2-3/4" backset, Manual relock.	
SI-7102-03-41	Bright Brass
SI-7102-26D-41	Satin Chrome
• 1" deadbolt, 2-3/8" backset, Manual relock.	
SI-7108-03-41	Bright Brass
• 1/2" deadlocking latch, 2-3/8" - 2-3/4", Auto relock.	
SI-7104-03-41	Bright Brass

REMEMBER: If you don't see what you need, please contact us with your requirements.

®ZIPF LOCK COMPANY

SIMPLEX LD450 SERIES LIGHT DUTY APPLICATION

SIMPLEX®

- Easily installs on wood or metal doors.
- Vandal resistant, metal pushbutton.
- **1-year warranty.**

SPECIFICATIONS

DOOR THICK.:	1-3/8" to 2-1/2"
BACKSET:	2-3/8" or 2-3/4", depending on lock ordered
THROW:	1/2"
STRIKE:	T-strike, 1-1/8" x 2-3/4"
HANDING:	Non-Handed, pre-assembled for right hand doors, easily changed in the field
LOCK BODY:	Height 6-1/16" x Width 2" x Depth 2-3/16"
MINIMUM STILE:	3-1/2"
FINISH:	**03*** Bright Brass **05*** Antique Brass **32D** Satin Stainless

**While supplies last. Discontinued by factory.*

Solid cast housing: Cast knob (outside) and lever (inside).

Knob Lock	Backset
SI-LD451-xx-41	2-3/8"
SI-LD452-xx-41	2-3/4"

xx=insert finish

Access Control: Mechanical push-button lock-eliminates problems and cost associated with issuing, controlling, and collecting keys and cards. No Battery: Fully mechanical lock eliminates the material and labor expense of battery replacement. Number of Codes: Single access code—one easy to manage code for all users. Programming: Lock is programmed via keypad once removed from door. Handing: Pre-assembled for right hand doors installations (easily changed in field).

SIMPLEX LD450 SERIES LIGHT DUTY APPLICATION

- Easily installs on wood or metal doors.
- Vandal resistant, metal pushbutton.
- **1-year warranty.**

SPECIFICATIONS

DOOR THICK.:	1-3/8" to 2-1/2"
BACKSET:	2-3/8" or 2-3/4", depending on lock ordered
THROW:	1/2"
STRIKE:	T-strike, 1-1/8" x 2-3/4"
HANDING:	Non-Handed, pre-assembled for right hand doors, easily changed in the field
LOCK BODY:	Height 7-7/16" x Width 2-1/4" x Depth 3"
MINIMUM STILE:	3-1/2"
FINISH:	**03*** Bright Brass **05*** Antique Brass **32D** Satin Stainless

**While supplies last. Discontinued by factory.*

Solid cast housings; solid cast levers: break away lever to keep would be vandals from damaging drive components.

Lever Lock	Backset
SI-LD471-xx-41	2-3/8"
SI-LD472-xx-41	2-3/4"

xx=insert finish

SIMPLEX 1000 SERIES LOCK PARTS

SIMPLEX®



SI-74366-000-01 (Old #201429-000-01) M-56/M-63 combination chamber for 1000, L1000, 3000, 8100 Series.

SI-204168-26D-01 Satin Chrome 1/2" floating front throw latch, 2-3/4" backset. For 1000 and L1000 series.

®ZIPF LOCK COMPANY